

MODEL 15-78RMT

2 machines in 1 for maximum menu flexibility! This pressurized machine produces high-quality, high-volume soft serve and shakes in one footprint. The shake side features a dispense-head-mounted mixer that blends flavors and/or crumb toppings into the shake product as it is dispensed, producing a high-quality, hand-made shake consistency. The fast, easy way to serve flavors regardless of the viscosity of the flavoring syrup or the fruit pulp it contains. The single-flavor soft serve is great for high-volumes of cones and sundaes. This machine is perfect for QSR's that want speed of delivery with the highest quality shakes and ice cream available!

The Electro Freeze Advantage


- Patented Mix Transfer System* simplest and most reliable pressurized system available.
- Flexible Mix Holding System Pumps directly from bags or from mix containers
- The Finest Frozen Product, consistently the best frozen product available. Smooth, creamy and profitable.
- Self Closing Spigots prevents the mess and eliminates waste
- Adjustable Dispense Rate set to meet your specific dispensing speed and volume requirements
- Exclusive Auger Design Superior low temperature refrigeration system provides the best in class production and product quality.
- Energy Conservation Mode reduces energy cost and holds product safely during nonbusiness hours
- Exclusive Mixer Design allows the operator to simultaneously dispense and blend in flavoring to reduce serving time.
- Experience Tells Electro Freeze has been manufacturing quality frozen treat machines since 1929. Superior engineering, product innovations, sturdy construct ion, quality craftsmanship and dependable performance are Electro Freeze hallmarks.
- Superior Service Support backed by a worldwide distributor network

PRESSURIZED SOFT SERVE & SHAKE FREEZER

Freedom 360° Series Combination Freezer



5-78RMT Shake Freezer

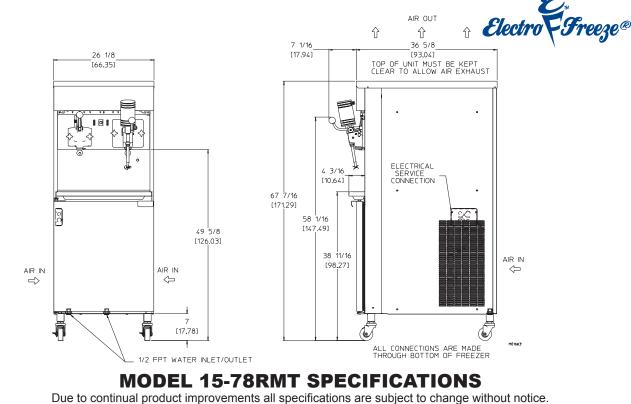

Weights	lbs.		kgs.		
Net	852		386		
Crated	957		434		
	cu.ft.		cu.m.		
Volume	58.42		1.65		
Dimensions	in.		cm		
Width	26-1/8		66.35		
Depth	36-5/8		93.03		
Height	67-7/16		171.29		
Electrical	Maximum		Minimum		Poles (P)
	Fuse S	oize	Circuit	Ampacity	Wires (W)
	Fuse S Soft	oize	Soft	Ampacity	wires (w)
	Soft	Shake	Soft		LT RT
208-230/60/1 Air	Soft		Soft		
208-230/60/1 Air 208-230/60/1 Wate	Soft Serve	Shake	Soft Serve	Shake	LT RT
	Soft Serve	Shake 30	Soft Serve 27	Shake 23.5	LT RT 2P, 3W*
208-230/60/1 Wate	Soft Serve 35 r 30 25	Shake 30 30	Soft Serve 27 24.5	Shake 23.5 22	LT RT 2P, 3W* 2P, 3W*
208-230/60/1 Wate 208-230/60/3 Air	Soft Serve 35 r 30 25	Shake 30 30 20	Soft Serve 27 24.5 19	Shake 23.5 22 18.5	LT RT 2P, 3W* 2P, 3W* 3P, 4W*

Electrical

Two dedicated electrical connections are required Manufactured to be permanently connected. See electrical chart for the proper requirement. Consult your local electrical codes for cord and receptacle specifications.

Beater Motor

One, 2 hp Soft Serve. One, 1-1/2 hp Shake

Refrigeration Systems

One, 9500 Btuh. R404a. Soft Serve One, 12000 Btuh. R404a. Shake Btuh may vary depending on compressor used.

Air Cooled

6" (15.2 cm) air space required at rear panel or both side panels and 18" (45.7cm) air space above unit for proper air circulation.

Mix Hopper Capacity: 2 - 26 quarts (24.6 liters) ea. Freezing Cylinder Capacity:

one - 5 quarts (4.7 liters) Soft Serve

one - 10.5 quarts (9.9 liters) Shake

Certified and/or listed by:





*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-M91(R2008) **Select Voltages @ 50HZ



Bidding Spec

Options:

Electro Freeze div. of H.C. Duke & Son, LLC

Cooling: Neutral Yes No

2116-8th Avenue, East Moline, Illinois 61244 USA Phone (309) 755-4553 • (800) 755-4545 FAX (309) 755-9858

factory or local distributor. Check nameplate for exact electrical data.

Electrical: Volt_____ Hz___

E-mail: sales@electrofreeze.com • www.electrofreeze.com

Authorized Distributor